



COMMON SPECIFICATION

| | |
|---|--|
| Output Short Circuit Protection | Continuous |
| Temperature Rise at Full Load | 30°C (TYP) |
| Cooling | Free Air Convection |
| No-load Power Consumption | 100mW (typical) |
| Operating Temperature Range | -40°C~+85°C |
| Storage Temperature Range | -55°C ~+125°C |
| Lead Temperature*** | 300°C (1.5mm from case for 10 seconds) |
| Storage Humidity Range | ≤ 95% |
| Case Material | Metal |
| MTBF | >1,000,000 hours |
| ***Lead Temperature 1.5mm from case for 10 seconds. | |

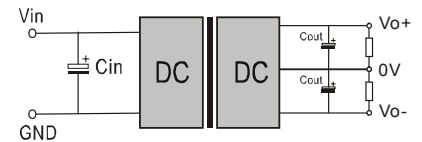

(Figure)

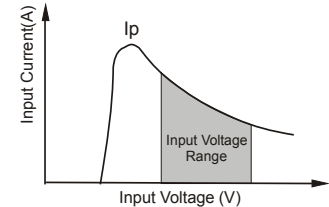

(Figure 2)

supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module. (See figure 2)

External Capacitor

Although this series of DC/DC converter can work without external capacitor, in order to keep an optimum performance, however, it needs external capacitor. (See Table 1)

Requirement on Output Load


To ensure this module operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is not less than 10% Of the full load, and that this product **should never be operated under no load!!!** If the actual load is less below the specified minimum load, the output ripple of this type of DC/DC converter will increase drastically and at the same time efficiency & reliability of the circuit will decrease deeply .If the actual output power from the load in your circuit is very small, please connect a resistor with proper resistance at the output end to in parallel to increase the load, or use our company's other products with a lower rated output power.

The products cannot be used in parallel and in plug and play.

External Capacitor Table (Table 1)


| Vin | Cin | Cout (0+70°C) | Cout (-40+85°C) |
|-----------------|-------|--------------------------------------|---------------------------------|
| 5V & 12V | 100uF | 100uF (electrolytic capacitor) | 47uF (tantalum capacitor) |
| 24V & 48V | 10uF | | |

TYPICAL CHARECTERISTICS

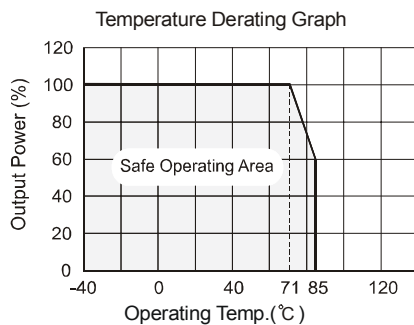


FOOTPRINT DETAILS

Bottom View

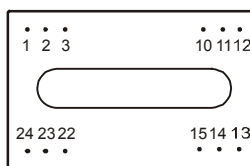

| Pin | Function |
|------------|----------|
| 1,24 | Vin |
| 12,13 | GND |
| 2,23 | -Vo |
| 11,14 | +Vo |
| 10,15,3,22 | 0V |

OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT

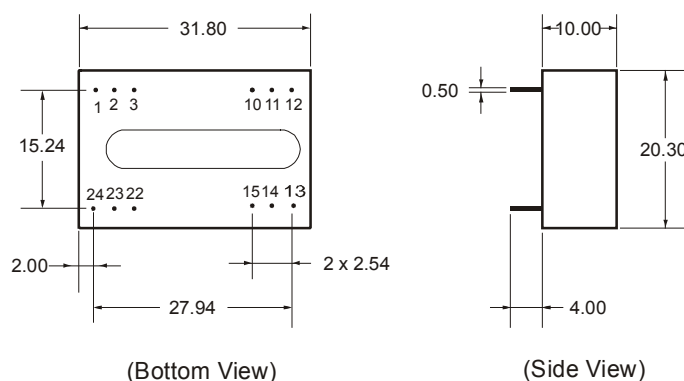

Note: All Pins on a 2.54mm pitch; All Pin diameters are 0.50 mm(Tolerance:±0.25);

APPLICATION NOTE

Recommended Circuit

All the PMA_MD-3W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (See Figure 1 & 2). If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high.(See table 1).If you want to use the products in high EMI, please choose our metal packaged products.

Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power



MORNSUN Science & Technology Ltd.

Address: 8th Floor 8th Building, Huangzhou Industrial District, Guangzhou, China

Tel :86-20-38601850

Fax:86-20-38601272

Http:// www.mornsun-power.com