


# CFM100

100 WATT OPEN FRAME  
AC-DC MODULES WITH PFC

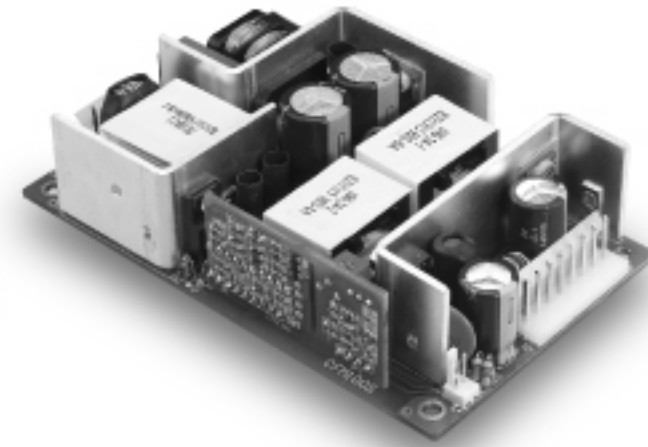

MODEL	OUTPUT VOLTAGE	MAX. LOAD	IN. LOAD	RIPPLE & NOISE	VOLTAGE ACCURACY	LINE REGULATION	LOAD REGULATION
CFM100S050	5 V	20 A	0A	1%	± 1%	± 0.5%	± 1%
CFM100S090	9 V	11.2 A	0A	1%	± 1%	± 0.5%	± 1%
CFM100S120	12 V	8.4 A	0A	1%	± 1%	± 0.5%	± 1%
CFM100S150	15 V	6.7 A	0A	1%	± 1%	± 0.5%	± 1%
CFM100S180	18 V	5.6 A	0A	1%	± 1%	± 0.5%	± 1%
CFM100S240	24 V	4.2 A	0A	1%	± 1%	± 0.5%	± 1%
CFM100S480	48 V	2.1 A	0A	1%	± 1%	± 0.5%	± 1%

**NOTE:**

1. Add a 0.1µf ceramic capacitor and a 10µf E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
2. Line regulation is measured from High Line to Low Line with full load.
3. Load regulation is measured from Full to 10% load.
4. Dimensions tolerance : +/- 1mm
5. Connectors: AC Input : Molex 5277 or equivalent  
DC output : Molex 5273 or equivalent
6. DC output pin 1,2,3,4 : Vout (+)  
DC output pin 5,6,7,8 : Vout (-)

## Features

- Universal Input : 90 ~ 264Vac
- Conductive EMI Meets CISPR/FCC Class B
- High Efficiency at 85% Typical

## Specifications

**INPUT CHARACTERISTICS:**

Voltage .....90 ~ 264Vac  
 Frequency .....47 to 63Hz  
 Inrush Current ..... 50A Max. @ 264Vac  
 Conducted EMI .....CISPR/FCC Class B  
 Isolation ..... Input to output =4,242Vdc  
 Leakage Current.....1.5mA max.

**ENVIRONMENTAL CHARACTERISTICS:**

Operating Temperature ..... 0 ~ 40°C  
 Storage Temperature ..... -20 ~ 85°C

**OUTPUT CHARACTERISTICS:**

Holdup Time .....8mS typ. @ 115Vac  
 Short Circuit Protection ..... Continuous  
 Over Voltage Protection ..... Auto Recovery

**MECHANICAL OUTLINE:**

Dimensions .....127 x 76.2 x 32.4 mm<sup>3</sup>

## Mechanical Specification

