

Nickel Metal Hydride Batteries


OVERVIEW

- Higher energy density provides longer run time than NiCds
- Environmentally friendly
- No memory effect
- Good storage capabilities
- Trickle and fast charge compatible



APPLICATIONS

- Data collection scanners
- Thermal printers
- Medical devices
- Photo equipment
- Toys/Radio controlled models
- Radios/CD players & MP3 players

C/10-C Discharge Profile @ 25°C

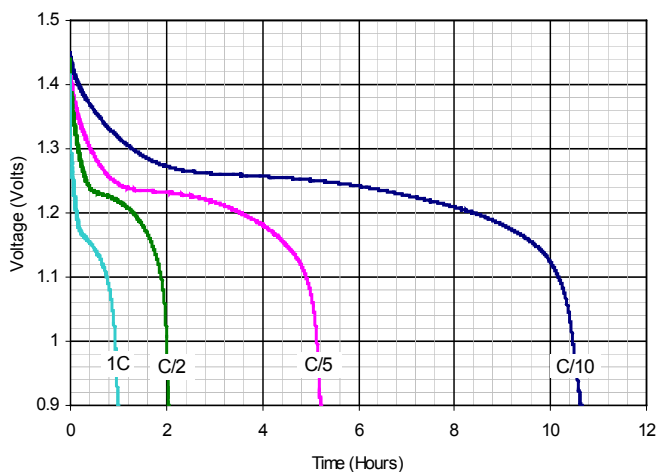

C-2C Discharge Profile

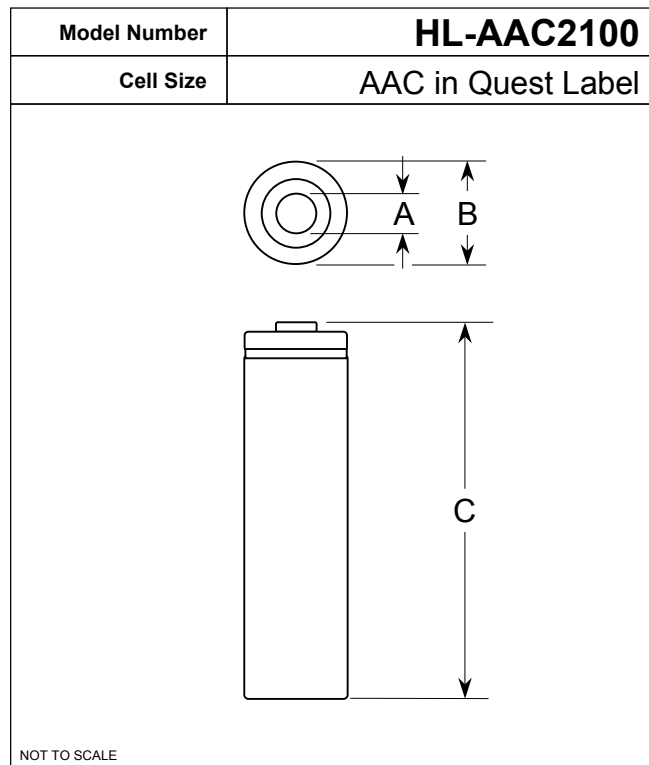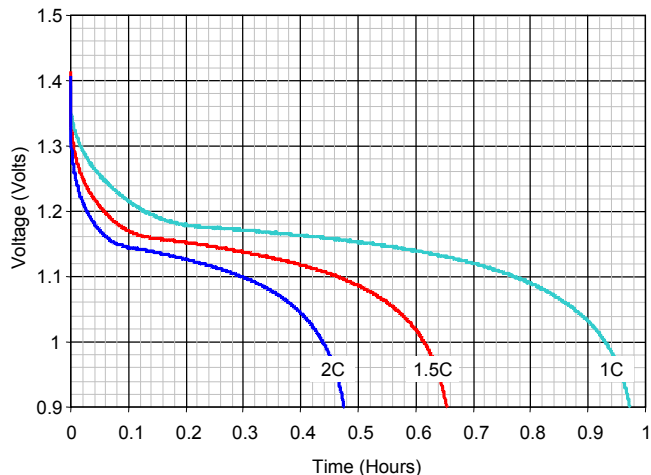

PHYSICAL CHARACTERISTICS (includes shrink sleeve)

Dimension	Measurement (mm)	Tolerance (mm)
A	5.3	+0/-0.1
B	14.2	+0/-0.5
C	50.0	+0/-0.5
Weight		26.5 g

ELECTRICAL CHARACTERISTICS

Nominal Voltage		1.2 V
Capacity	Typical	2100 mAh
	Minimum @ C/5	1900 mAh
Internal Resistance @ 1000 Hz		22.0 mΩ
Cycle Life (minimum)		500 cycles

CHARGE SPECIFICATIONS

Standard Charge	C/10 for 16 hours
Fast Charge (with proper termination)	1C

DISCHARGE SPECIFICATIONS

Current	Continuous	3C
	Spikes	6C
Minimum Voltage/Voltage Cutoff		1.0 V

TEMPERATURE

Charging	10°C to 40°C
Discharging	10°C to 40°C
Storage	-20°C to 30°C