

Nickel Metal Hydride Batteries


OVERVIEW

- Higher energy density provides longer run time than NiCds
- Environmentally friendly
- No memory effect
- Good storage capabilities
- Trickle and fast charge compatible


APPLICATIONS

- Data collection scanners
- Thermal printers
- Medical devices
- Photo equipment
- Toys/Radio controlled models
- Radios/CD players & MP3 players

C-3C Discharge Profiles @ 25°C

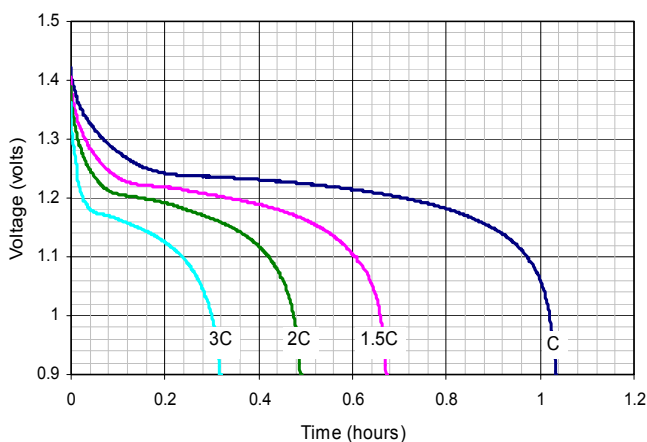

C Discharge Profiles @ 0°C, 25°C, & 40°C

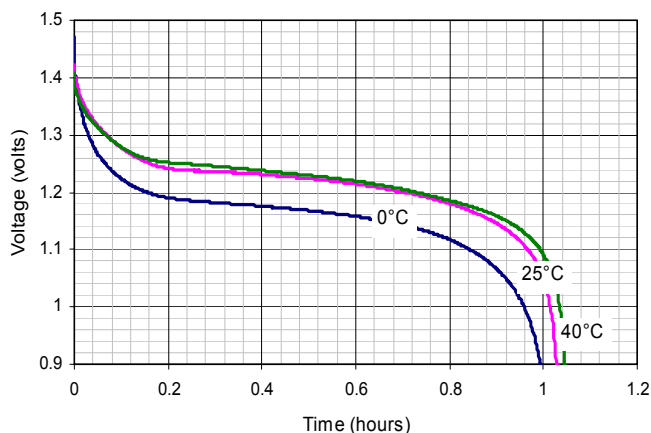

Model Number	HS-2/3AA750
Cell Size	2/3AA

NOT TO SCALE

PHYSICAL CHARACTERISTICS (includes shrink sleeve)

Dimension	Measurement (mm)	Tolerance (mm)
A	7.0	+0/-0.1
B	14.2	+0/-0.5
C	29.0	+0/-0.5
Weight		15.0 g

ELECTRICAL CHARACTERISTICS

Nominal Voltage		1.2 V
Capacity	Typical	750 mAh
	Minimum @ C/5	700 mAh
Internal Resistance @ 1000 Hz		21.0 mΩ
Cycle Life (minimum)		500 cycles

CHARGE SPECIFICATIONS

Standard Charge	C/10 for 16 hours
Fast Charge (with proper termination)	1C

DISCHARGE SPECIFICATIONS

Current	Continuous	5C
	Spikes	10C
Minimum Voltage/Voltage Cutoff		1.0 V

TEMPERATURE

Charging	10°C to 40°C
Discharging	10°C to 40°C
Storage	-20°C to 30°C