


THREE PHASE WYE FILTERS, 250/440VAC, TPY SERIES



FEATURES AND SPECIFICATIONS

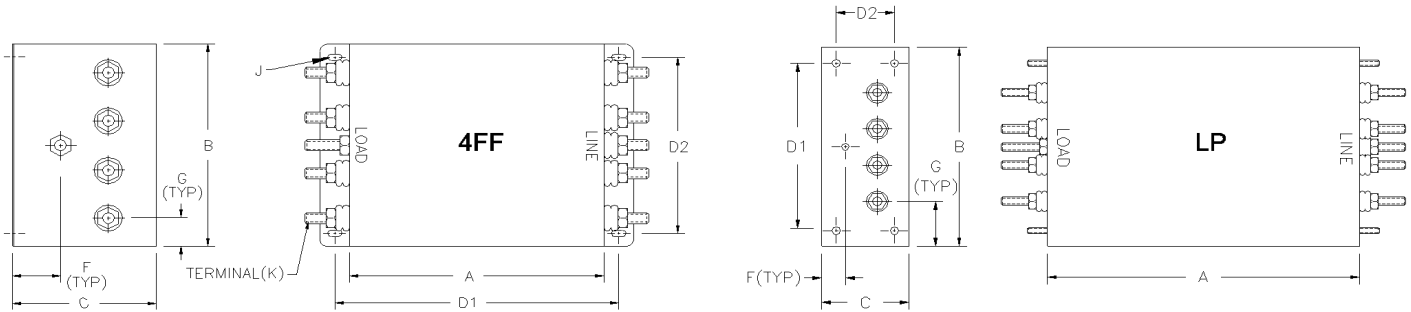


SPECIFICATIONS

1.0 HIGHPOT RATING:

LINE-TO-GROUND: 2000 VAC
 LINE-TO-LINE: 2400 VDC

2.0 MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND.

(7.5A to 100A) 277 VAC, 60 Hz: 1.50 mA MAX
 (150A to 200A) 277 VAC, 60 Hz; 2.50 mA MAX

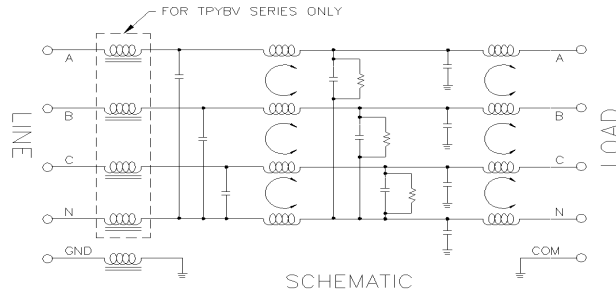

3.0 RATED VOLTAGES AND FREQUENCY: 250/440 VAC, 47-63 Hz

4.0 PERFORMANCE

	0.05	0.15	0.50	1.50	5.00	20.0	30.0
C/M L/G	10 dB	50 dB	55 dB	65 dB	65 dB	65 dB	65 dB
D/M L/L	20 dB	50 dB	50 dB	60 dB	60 dB	60 dB	60 dB

5.0 DIMENSIONS

PART NUMBER	RATED CURRENT									
		A	B	C	D1	D2	F	G	J	K
TPYBV7-4FF	7.5A	7.00	4.00	4.00	7.81	3.25	1.33	0.80	.18 X .37	#8-32 UNC
TPYBV20-4FF	20A	7.00	5.00	3.00	7.50	4.00	1.00	1.00	.18 X .37	#8-32 UNC
TPYBV30-4FF	30A	8.00	5.00	4.75	9.00	4.00	1.58	1.00	.18 X .37	#10-32 UNC
TPYBV30LP-4FF	30A	9.50	5.50	2.25	4.62	1.50	0.61	1.25	N/A	#10-32 UNC
TPYA45-4FF	45A	11.00	5.00	4.75	11.96	4.00	1.58	1.00	.25 X .50	#1/4-20 UNC
TPYA60-4FF	60A	12.00	6.50	4.75	13.00	5.50	1.58	1.25	.31 X .62	#1/4-20 UNC
TPYA60LP-4FF	60A	9.50	5.50	2.25	4.62	1.50	0.61	1.25	N/A	#1/4-20 UNC
TPYA100-4FF	100A	12.00	6.50	4.75	13.00	5.50	1.58	1.25	.31 X .62	#3/8-16 UNC
TPYA150-4FF	150A	12.00	7.50	5.75	13.00	5.25	1.92	1.88	.31 X .62	#3/8-16UNC
TPYA200-4FF	200A	16.00	7.50	5.75	17.00	5.25	1.92	1.88	.31 X .62	#3/8-16UNC

6.0 FEATURES

- * RUGGED CONSTRUCTION
- * REDUCES RADIATED AND CONDUCTED EMISSIONS FROM VFD