


THREE PHASE WYE FILTERS, 250/440VAC, TPY FILTERS



FEATURES AND SPECIFICATIONS

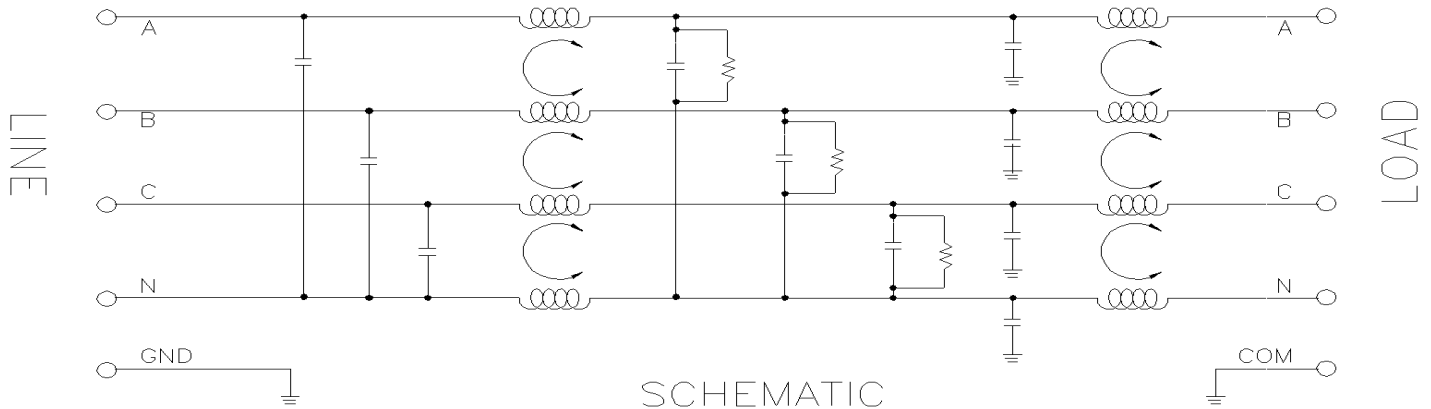

SPECIFICATIONS

1.0 HIGHPOT RATING:

LINE-TO-GROUND: 2000 VAC
LINE-TO-LINE: 2400 VDC

2.0 MAXIMUM LEAKAGE CURRENT, 250 VAC,
60 Hz, EACH LINE TO GROUND.
1.00 mA MAX

5.0 DIMENSIONS

PART NUMBER	RATED CURRENT	NOTE: FOR MOUNTING OPTIONS, SEE PAGE 2.										
		A	B	C	D1	D2	D3	D4	F	G	J	K
TPY20-4FF	20	5.00	4.00	4.00	5.81	3.25	—	—	1.33	0.80	.18X.37	#8-32UNC
TPY20-4IF	20	5.00	4.00	4.00	—	3.25	3.25	5.40	1.33	0.80	.18X.37	#8-32UNC
TPY20-4SF	20	5.00	4.00	4.00	—	3.25	3.25	5.40	1.33	0.80	.18X.37	#8-32UNC
TPY30-4FF	30	5.00	4.00	4.00	5.81	3.25	—	—	1.33	0.80	.18X.37	#10-32UNC
TPY30-4IF	30	5.00	4.00	4.00	—	3.25	3.25	5.40	1.33	0.80	.18X.37	#10-32UNC
TPY30-4SF	30	5.00	4.00	4.00	—	3.25	3.25	5.40	1.33	0.80	.18X.37	#10-32UNC
TPY45-4FF	45	7.00	4.00	4.00	7.81	3.25	—	—	1.33	0.80	.18X.37	#1/4-20UNC
TPY45-4IF	45	7.00	4.00	4.00	—	3.25	3.25	7.40	1.33	0.80	.18X.37	#1/4-20UNC
TPY45-4SF	45	7.00	4.00	4.00	—	3.25	3.25	7.40	1.33	0.80	.18X.37	#1/4-20UNC
TPY60-4FF	60	8.00	5.00	4.75	9.00	4.00	—	—	1.58	1.00	.25X.50	#1/4-20UNC
TPY60-4IF	60	8.00	5.00	4.75	—	4.00	3.75	8.50	1.58	1.00	.25X.50	#1/4-20UNC
TPY60-4SF	60	8.00	5.00	4.75	—	4.00	3.75	8.50	1.58	1.00	.25X.50	#1/4-20UNC

6.0 FEATURES


- * RUGGED CONSTRUCTION
- * REDUCES RADIATED AND CONDUCTED EMISSIONS
- * SUITABLE EITHER FOR WYE OR DELTA CONNECTION




TRI-MAG, Inc.
your POWER Specialists

1601 N. CLANCY CT. • VISALIA, CA 93291
 (559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
<http://eemonline.com/tri-mag>
 tri-mag@worldnet.att.net


THREE PHASE WYE FILTERS, 250/440VAC, TPY FILTERS

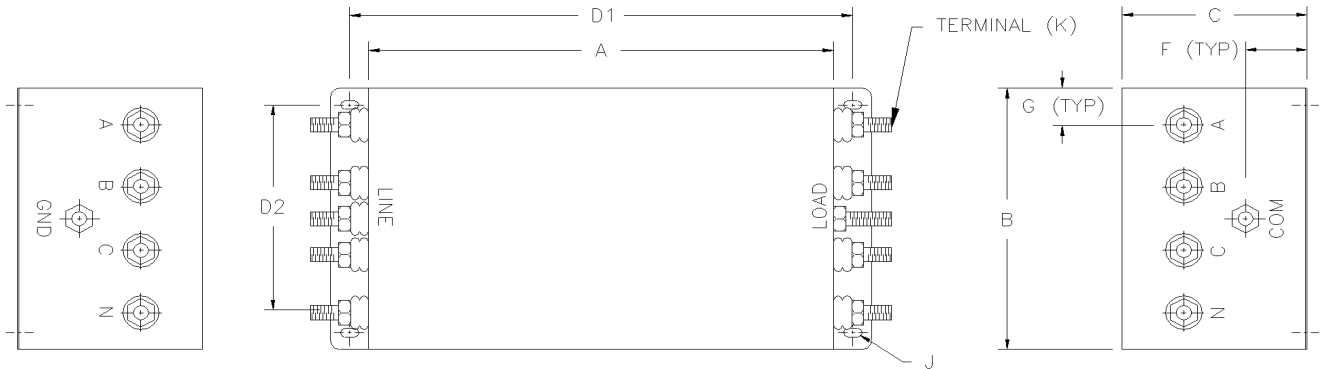

FF OPTION

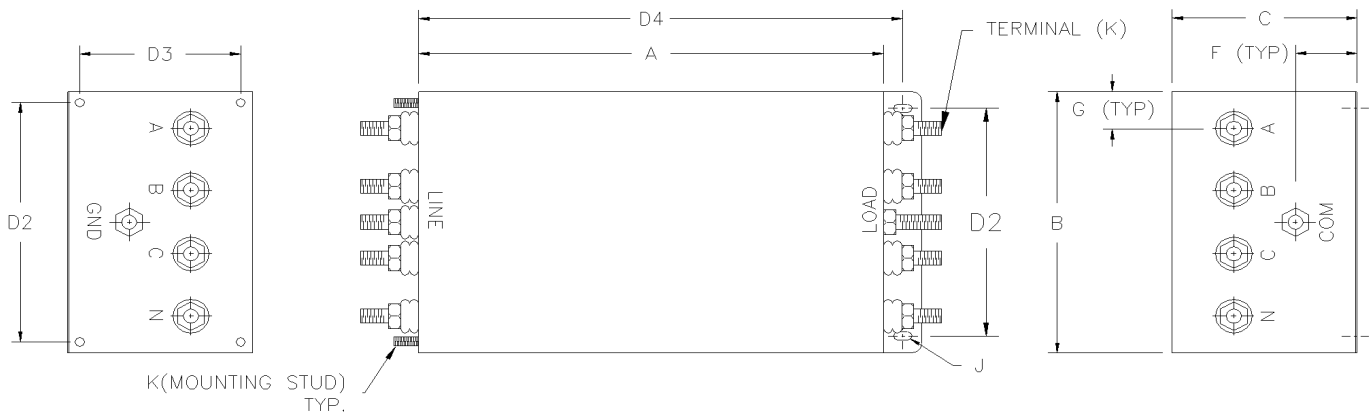

SF OPTION

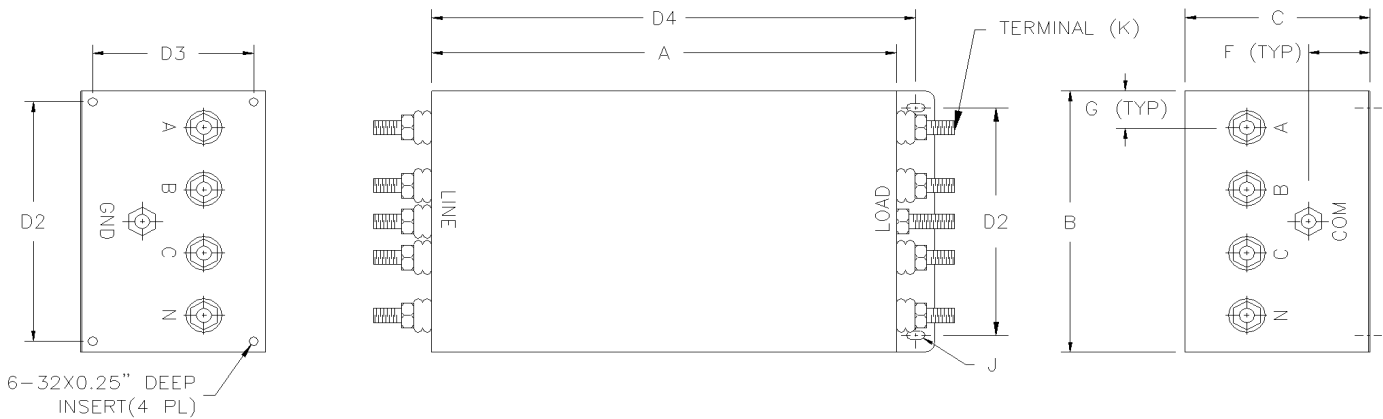

IF OPTION