



TRI-MAG, Inc.

® *your* **POWER Specialists**

1601 N. CLANCY CT. • VISALIA, CA 93291
(559) 651-2222 • FAX (559) 651-0188
<http://www.tri-mag.com>
<http://eemonline.com/tri-mag>
tri-mag@worldnet.att.net

UV460M SERIES

60 Watt

UNIVERSAL INPUT

For Medical Application



GENERAL SPECIFICATIONS

Input Voltage.....	85VAC to 265VAC or 120VDC to 350VDC
Input Frequency.....	47Hz to 440Hz
Inrush Current (cold).....	15A @ 115VAC 30A @ 230VAC
Operating Temperature.....	0 to 50°C Linear Derating to 50% load @ 70°C
Storage Temperature.....	- 20°C to 85°C
Cooling.....	Free Air Convection
Efficiency.....	70% Typical
Holdup Time.....	20ms at 115VAC
Overvoltage Type.....	Crowbar Trip Point, 6.2V ± 0.4V or Rated Output +2V
Overload Protection.....	Foldback at 150% load
Output #1 Voltage Adjustable.....	±10%
Switching Frequency.....	>30KHz
Safety:	
Designed in full compliance with.....	UL 2601-1 CSA 22.2 #601-1 VDE EN60601-1 IEC 601

DESCRIPTION

Tri-Mag, Inc. UV460M Series is a 60 watt switchers feature small size, low cost, high efficiency with universal input voltage (85-265VAC) without jumpers.



Both single output and multiple output models are available. The UV460M Series is designed in full compliance to UL2601-1, CSA22.2#601-1, and VDEEN60601-1, IEC601. This series is designed for medical applications.

FEATURES

- 85 TO 265VAC Universal Input
- Innovated Mosfet Design
- Low Cost
- High Efficiency
- Built-in Line Filter to Meet FCC Class B
- 100% Hi-Pot Test
- 100% Cycling On-Off Burn-In Test
- Low Leakage Current

APPLICATIONS

- Small Digitally Based System Used in Medical and Dental Environment
- Any System Requiring Low Leakage Current Power Supply

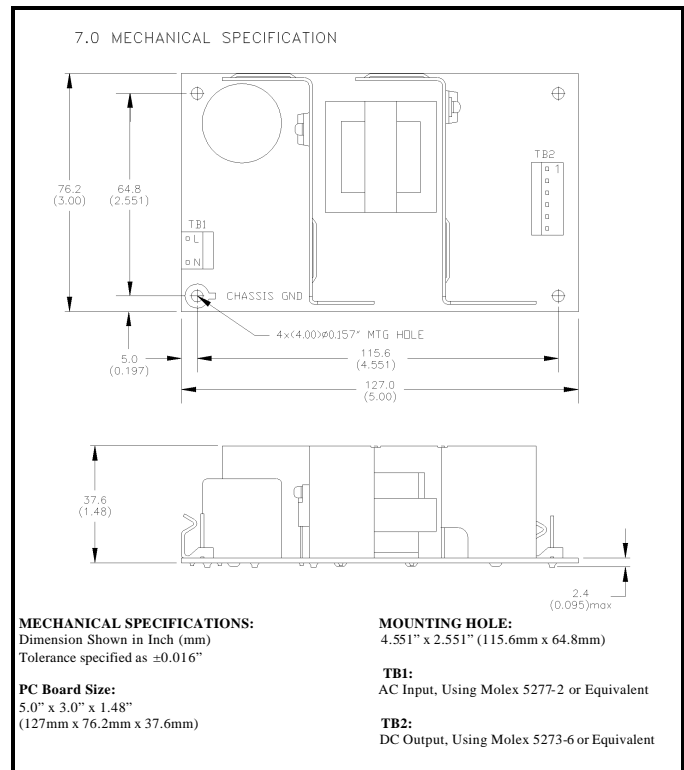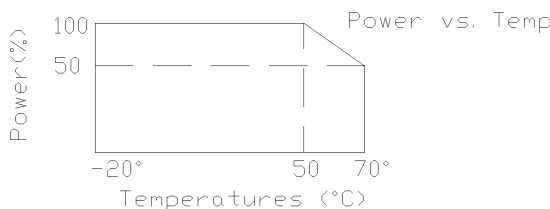

**TRI-MAG, Inc.**® *your* **POWER Specialists**

1601 N. CLANCY CT. • VISALIA, CA 93291

(559) 651-2222 • FAX (559) 651-0188

<http://www.tri-mag.com><http://eemonline.com/tri-mag>

tri-mag@worldnet.att.net

UV460M SERIES 60 WATT— PIN ASSIGNMENT

Pin	1	2	3	4	5	6
UV460M-1	+12V	+5V	+5V	COM	COM	-12V
UV460M-4	+5V	+5V	+5V	COM	COM	COM
UV460M-5	+12V	+12V	+12V	COM	COM	COM
UV460M-6	+15V	+15V	+15V	COM	COM	COM
UV460M-7	+24V	+24V	+24V	COM	COM	COM
UV460M-12	+12V	+5V	+5V	COM	COM	N/C

UV460M SERIES 60 WATT— OUTPUT SPECIFICATIONS

Model	Voltage (Vdc)	Load (A)			Tolerance ±	Ripple & Noise	Regulation	
		Min.	Rate	Peak			Line	Load
UV460M-1	+5V	0	5	5.0	1%	50 mV	1%	3%
	+12V	0	2.3	3.0	3%	100 mV	2%	4%
	-12V	0	0.5	0.5	3%	100 mV	3%	5%
UV460M-4	+5V	0	12.0	-	1%	100 mV	1%	1%
UV460M-5	+12V	0	5.5	-	1%	100 mV	1%	1%
UV460M-6	+15V	0	4.5	-	1%	100 mV	1%	1%
UV460M-7	+24V	0	2.75	-	1%	150 mV	1%	1%
UV460M-12	+5V	0	5	5.0	1%	50 mV	1%	1%
	+12v	0	2.8	5.0	5%	100 mV	2%	4%

Note: Contact factory for Safety Agency Approved status.

All specifications and prices subject to change without notice