


Datasheet



Output Current	2.5 Amps maximum
Output Voltage	24 VDC $\pm 1.5V$
Output Power	60 Watts maximum
Output Cable	8 ft. ± 6 in. extended
Output Connector	2.5mm Center Positive
Input Voltage	13.6 VDC Nominal
Input Connector	Expanding Lighter Adapter
Weight	6.4 oz. typical
Input Current	8.0 Amp
Load Regulation	$\pm 7\%$
Output Ripple	100mV RMS
Overload Protection	Current limited
Short Circuit Protection	PEPI Resettable Fuse
EMI	Complies with FCC part 15 Class B, EN55011, EN55022, VFG243 Class B

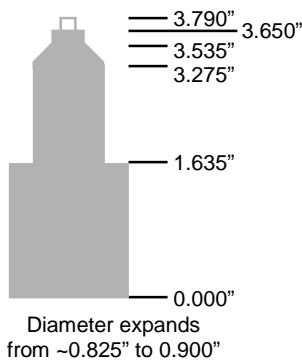

Case	ABS Molded Thermoplastic 94-HB
Ambient Temperature	Storage: -20 to $+85$ C Operating: 0 to 45 C
Ambient Humidity	10 to 90% Non-condensing
Warranty	1 year

Agency Approvals:



Class B
FC
Cispr 22