



D_S-2W/ D_D-2W Series

FIXED INPUT ISOLATED & UNREGULATED
2W OUTPUT TWIN INDEPENDENT OUTPUT
MINIATURE SIP/DIP PACKAGE



RoHS  multi-country patent protection

FEATURES

- Efficiency up to 87%
- Small Footprint
- Super miniature SIP/DIP Package
- Twin Output Voltage
- 1KVDC Isolation
- Temperature Range: -40°C~+85°C
- Industry Standard Pinout
- UL94-V0 Package
- No Heat sink Required
- No External Component Required
- PCB Mounting
- Custom Service Available
- RoHS Compliance

APPLICATIONS

The D_S/D-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage = 1000VDC);
- 3) Where the regulation of the output voltage and the output ripple and noise are not demanding.


Such as: purely digital circuits, ordinary low frequency analog circuits and IGBT power device driven circuits, etc.

These products don't apply to:

- 1) Where the input supply voltage is varied (variation $\geq \pm 10\%$), otherwise our company's WRA series is recommended;
- 2) Where the isolation voltage between input and output is required to be $> 1000\text{VDC}$, otherwise our company's ED Series of products are recommended;
- 3) Circuits in which the output voltage regulation is demanding, otherwise our company's IF Series or WRF Series are recommended;
- 4) The output load's actual power consumption is less than 0.25W, otherwise our company's D_S/D-1W Series are recommended.

MODEL SELECTION

D050505S/D-2W

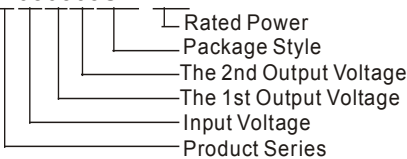

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Package Style
	Voltage (VDC)		Vo1, Vo2 (VDC)	Io1, Io2 (mA)			
	Nominal	Range		Max	Min		
D050505S/D-2W	5	4.5~5.5	5	200	20	82	SIP/DIP
D050909S/D-2W	5	4.5~5.5	9	112	12	83	SIP/DIP
D051212S/D-2W	5	4.5~5.5	12	84	9	85	SIP/DIP
D051515S/D-2W	5	4.5~5.5	15	67	7	85	SIP/DIP
D120505S/D-2W	12	10.8~13.2	5	200	20	83	SIP/DIP
D120909S/D-2W	12	10.8~13.2	9	112	12	84	SIP/DIP
D121212S/D-2W	12	10.8~13.2	12	84	9	86	SIP/DIP
D121515S/D-2W	12	10.8~13.2	15	67	7	86	SIP/DIP
D240505S/D-2W	24	21.6~26.4	5	200	20	84	SIP/DIP
D240909S/D-2W	24	21.6~26.4	9	112	12	85	SIP/DIP
D241212S/D-2W	24	21.6~26.4	12	84	9	87	SIP/DIP
D241515S/D-2W	24	21.6~26.4	15	67	7	87	SIP/DIP
D242424S/D-2W	24	21.6~26.4	24	83	8	87	SIP/DIP

Note: here Io1 and Io2 are corresponded with Vo1 and Vo2.

COMMON SPECIFICATION

Short circuit protection	1 second
Temperature rise at full load	25°C MAX, 15°C TYP
Cooling	Free air convection
No load power consumption	10% nominal power (typical)
Operation temperature range	-40°C~+85°C
Storage temperature range	-55°C ~+125°C
Lead temperature*	300°C (1.5mm from case for 10 seconds)
Storage humidity range	$\leq 95\%$
Case material	Plastic(UL94-V0)
MTBF	$> 3,500,000$ hours

ISOLATION SPECIFICATIONS

Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute	1000			VDC
Isolation resistance (Vin/Vout)	Test at 500VDC	1000			MΩ
Isolation resistance (Vo1/Vo2)	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test condition	Min	Typ	Max	Units
Output power		0.2		2	W
Line regulation	For Vin change of 1%			1.2	%
Load regulation	10% to 100% full load			15	%
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Output ripple	20MHz Bandwidth		100	200	mVp-p
Switching frequency	Full load, nominal input		75		KHz

Note:



1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.



MORNSUN Science & Technology Ltd.

Address: 8th floor 8th building Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
Http: //www.mornsun-power.com


TYPICAL CHARACTERISTICS

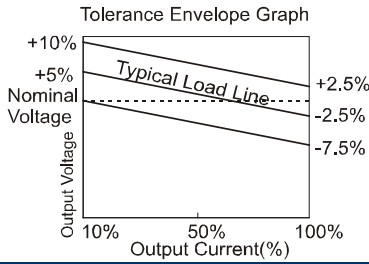


FOOTPRINT DETAILS

Pin	Function	DXXXXXS-Series		Pin	Function	DXXXXXD-Series	
1	Vin			1	GND		
2	GND			7	NC		
4	0V1			8	+V02	14	
5	+Vo1			9	0V2	11	10
6	0V2			10	+Vo1		9
7	+V02			11	0V1		8
				14	Vin	1	7


DXXXXXS-2W Package

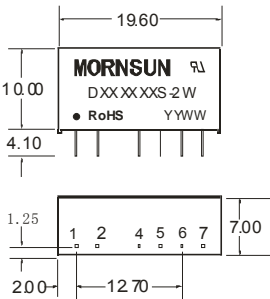


DXXXXXS-2W Footprint

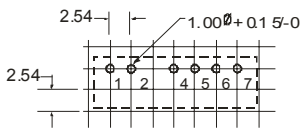

DXXXXXD-2W Package

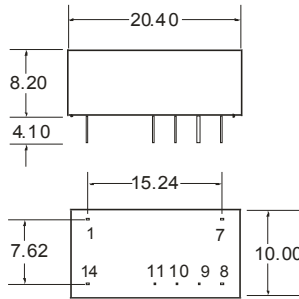

DXXXXXD-2W Footprint

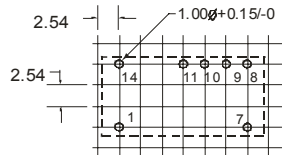

Note: All Pins on a 2.54mm pitch; All Pin diameters are 0.50 mm; all dimensions in mm.



APPLICATION NOTE

Filtering

In some circuits which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees the external capacitor table. To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, which may produce a more significant filtering effect. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (see figure 1).

Requirement On Output Load

To ensure this module can operate efficiently and reliably, a minimum load is specified for this kind of DC/DC converter in addition to a maximum load (namely full load). During operation, make sure the specified range of input voltage is not exceeded, the minimum output load is **not less than 10%** of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (D_S(D) -1W Series).

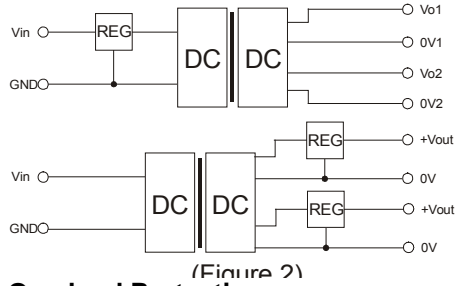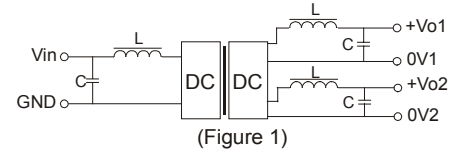

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (see Figure 2).

External Capacitor Table

V _{in}	External capacitor	V _{out}	External capacitor
5VDC	4.7uF	5VDC	4.7uF
12VDC	2.2uF	9VDC	2.2uF
24VDC	1uF	12VDC	1uF
--	--	15VDC	0.47uF



MORNSUN Science & Technology Ltd.

Address: 8th floor 8th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
Http: //www.mornsun-power.com